



Equiplite[®] Gennaker Blocks GCB (SpB)-STYLE Installation and data sheet.

Dear Customer,

Thank you for purchasing Equiplite[®].

General information

CORe[™] GCB-STYLE products employ a proprietary certificated fibre loop to take the majority of the load in the blocks, with multiple coils of Dyneema[®] and an abrasion-and UV-resistant high quality Black Dyneema[®] cover. They are pre-stretched and steamed so the multiple laps evenly share the load to provide maximum strength.

- Break Load \approx 2x MWL.
- Marine hard anodised Hi Tensile Aluminium parts.

Installation

IMPORTANT, PLEASE READ

Just pass the loop through the hole and back over a groove on the fitting. . Don't forget to fasten the Velcro[™].

- Loops should be connected to a matching part that is rounded and free from sharp edges or burrs.
- Blocks should be free to align themselves with the load.
- This is very important as blocks, especially when used for Gennaker/Spinnaker deck lead blocks when constrained cause incorrect alignment. This could result in damage to the side plates. Fittings will last indefinitely if the above is followed.

However, soft attachments require regular attention to ensure they are in good condition. You should frequently inspect your equipment or have a professionally maintained boat programme.


Maintenance

When should soft attachments be replaced?

Weather, chafing, stress, and UV light damage soft attachments over time. Look for signs of wear, abrasion, or discoloration. CB Fibre loop sold through Equiplite® has coloured UV-sensitive that fade to indicate significant exposure.

- After sailing in salt water, cleaning the hardware with fresh water will prolong its lifespan.
- Loops should be replaced if excessive wear occurs and matching parts should be checked.
- Equiplite® provides world-wide service for your Equiplite® products.

Global service: service@equiplite.com

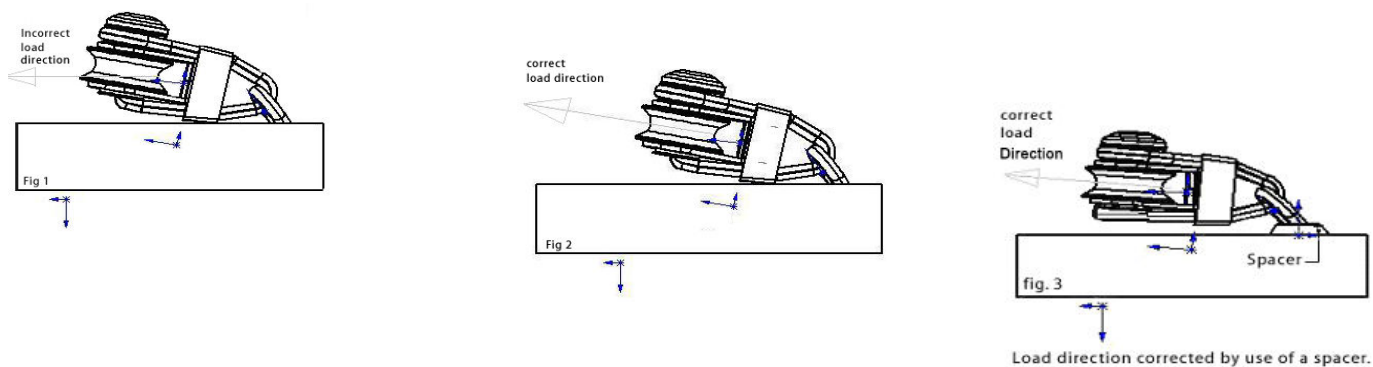

We hope that this data sheet will help you with the easy installation and maintenance of our products.

Best Regards,
Equiplite®

