

## Equiplite™ Europe **Sail hanks** Installation and data sheet.

Dear Customer,

Thank you for purchasing this Equiplite product(s).


Equiplite equipment is warranted for 6 months from the date of sale to be free of defective material and workmanship and must be used in accordance with specifications and accepted good practice.

### Installation

- The max amount of webbing should be used for the size hole in the button for the max MWL.  
There is no exact loop size required, but the loop should be just large enough for the button to fit.
- It is best if the loop webbing is crossed over itself to form the opening for the button.
  - The pin is best retained by using clear silicone when fitted.
- The button does not need to be tightly sewn against the sail.

For 5H, 6H and 8H we advise  
Bison silicon/fibre-glass paste  
to fix the webbing with the pin  
in the Equiplite sail hank.

For the 10H and 12H use Bison  
silicon/fibre-glass paste to fix the  
webbing and pin in the Equiplite  
sail hank.

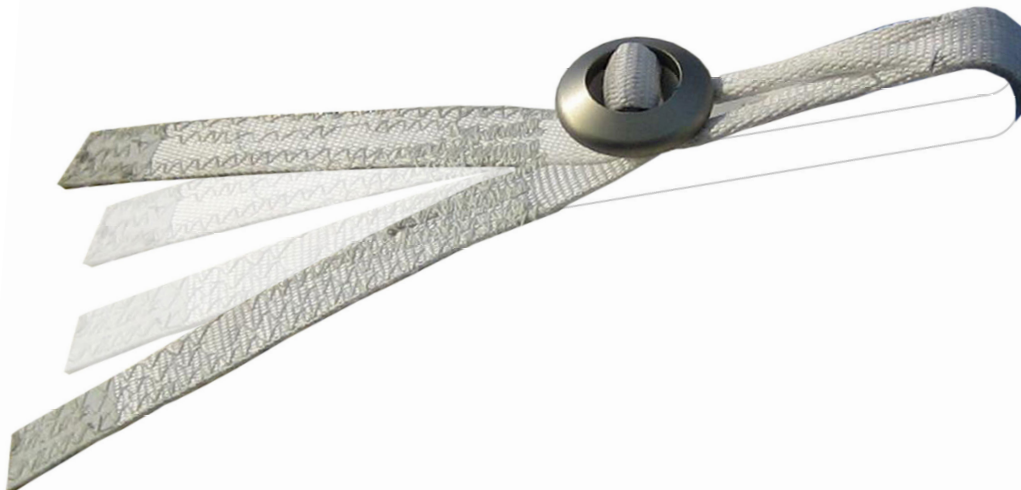

\* Equiplite sail hanks are delivered without webbing.

We hope that this data sheet will help you with the easy installation and maintenance of our products.

Best Regards,  
Equiplite Europe



(B)